




SPECIFICATION OF 250W 255W 260W 265W POLY SOLAR MODULE

PRODUCT SPECIFICATION

Type Of Module	JCN-P250	JCN-P255	JCN-P260	JCN-P265
Maximum Power (W)	250	255	260	265
Tolerance (%)	± 3%	± 3%	± 3%	± 3%
Open Circuit Voltage (V)	37.5	37.5	37.5	37.5
Maximum Power Voltage (V)	29.93	29.93	29.93	29.93
Maximum Power Current (A)	8.35	8.52	8.69	8.85
Short Circuit Current (A)	9.2	9.4	9.6	9.7
Module Efficiency (%)	15.4	15.7	16	16.3
Solar Cell Efficiency (%)	18	18.4	18.6	19
Series Fuse Rating (A)	15	15	15	15
Terminal Box	IP65	IP65	IP65	IP65
Maximum system voltage (V)	DC1000	DC1000	DC1000	DC1000
Operating Temperature(°C)	-40°C ---85°C	-40°C ---85°C	-40°C ---85°C	-40°C ---85°C

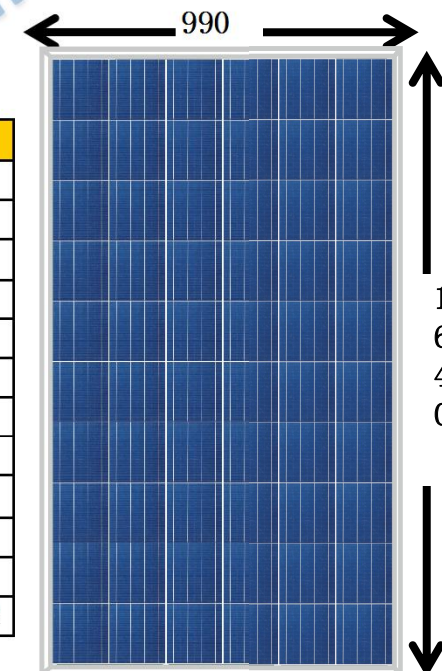

PRODUCT FEATURE

- Bypass diode minimizes the power drop by shade.
- The conversion efficiency of solar cell is above 18%.
- White tempered glass ,EVA resin,weather proof film and anodized aluminum frame to provide efficient protection from the severest environmental conditions.
- Waterproof.Perfect for grid applications.
- Product guarantee 5 years.


Quality Assurance

- Electrical Insulation test
- Outdoor exposure test
- Hot-spot endurance test
- UV-exposure
- Thermal cycling test
- Humidity freeze test
- Damp heat Test
- Robustness of terminations test
- Wet leakage current test
- Mechanical load test
- Hail impact test
- Bypass diode thermal test



Electrical Characteristics

Current-Voltage & Power-Voltage characteristics various irradiance levels

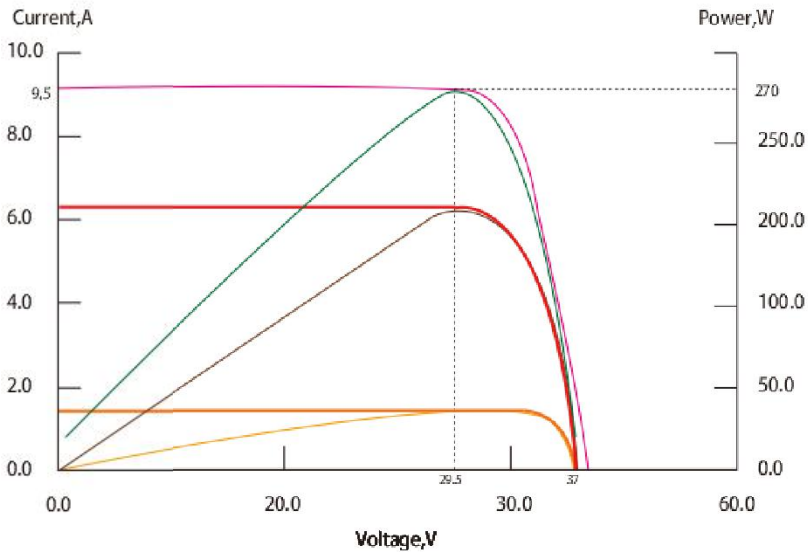

Electric Performance Typical Performance Characteristics

Short Circuit Current Temperature Coefficient	mA/C	+2.5
Open Circuit Voltage Temperature Coefficient	V/C	-0.147
Maximum Power Temperature Coefficient	%/C	-0.4
Performance Warranty : 90%output , 12 years 80%output , 25 years		

Physical Specifications

Dimension: 1640*990*35*35mm


Weight: 20KG/PCS

Packing : 2pcs in one carton

Loading Capacity:

200pcs/ 20' Container

440 pcs/ 40' Container

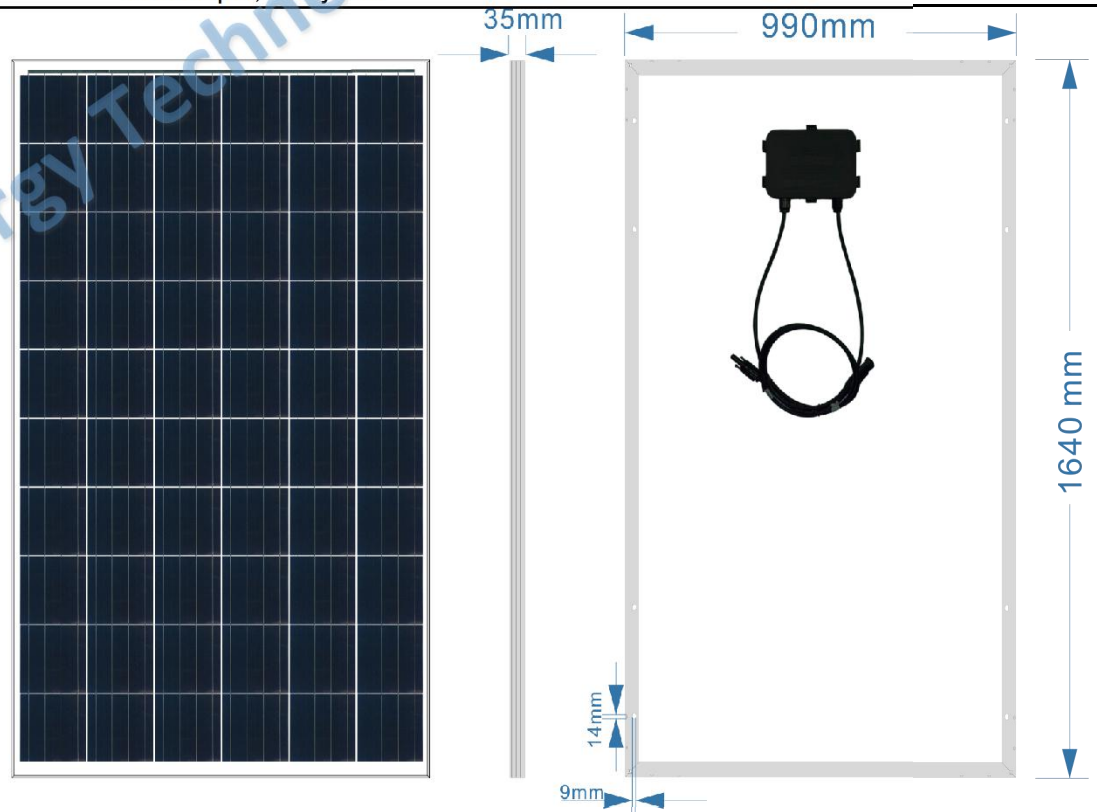

SHENZHEN JCN NEW ENERGY CO.,LTD.

Add 1: No.5, Dayang Road, 2nd Industry Zone, Yulv community, Gongming Street, Guangming New District, Shenzhen
Add 2: Buildings 6, CSST Industrial Park, Gongchang Rd., Zhenmei Village, Guangming New District, Shenzhen, Guangdong China

Tel:+86- 755 27094995 -8020

Fax: +86-755 27164829

Website: www.jcnsolar.com www.jcnsolar.com.cn

Email: belly@solarszled.com

